

RAFTURI DEPOZITARE USOARA

Free-standing **R.A.P.** shelving

Componente:

STALPI

Sectiune : 40 x 20 mm, cu 12 indoituri

5 inaltimi standard : 1000, 1750, 2000, 2250 si 2500 mm

POLITE

Componenta:

- 2 profile transversale
- 2 profile longitudinale exterioare
- 1,2 sau 3 profile longitudinale interioare, in functie de adancimea politei

LUNGIMI STANDARD MODULE : 1000 si 1250 mm (ax-ax stalpi)

ADANCIMI POLITE :

250, 300, 350 SI 400 mm
cu 3 profile pe lungime(2 exterioare,
1 interior)



350 mm special proiectat
pentru dosare suspendate



500, 600 si 700 mm cu
4 profile (2 exterioare,
2 interioare)



800 mm cu 5 profile (2 exterioare, 3 interioare)

SUPRAFATA POLITE : - PFL 3 mm
- PFL ALB 3 mm




CULORI :

STALPI : - Gri RAL 7016. Vopsire electrostatica.

- Zincati

POLITE : - ZINCATE



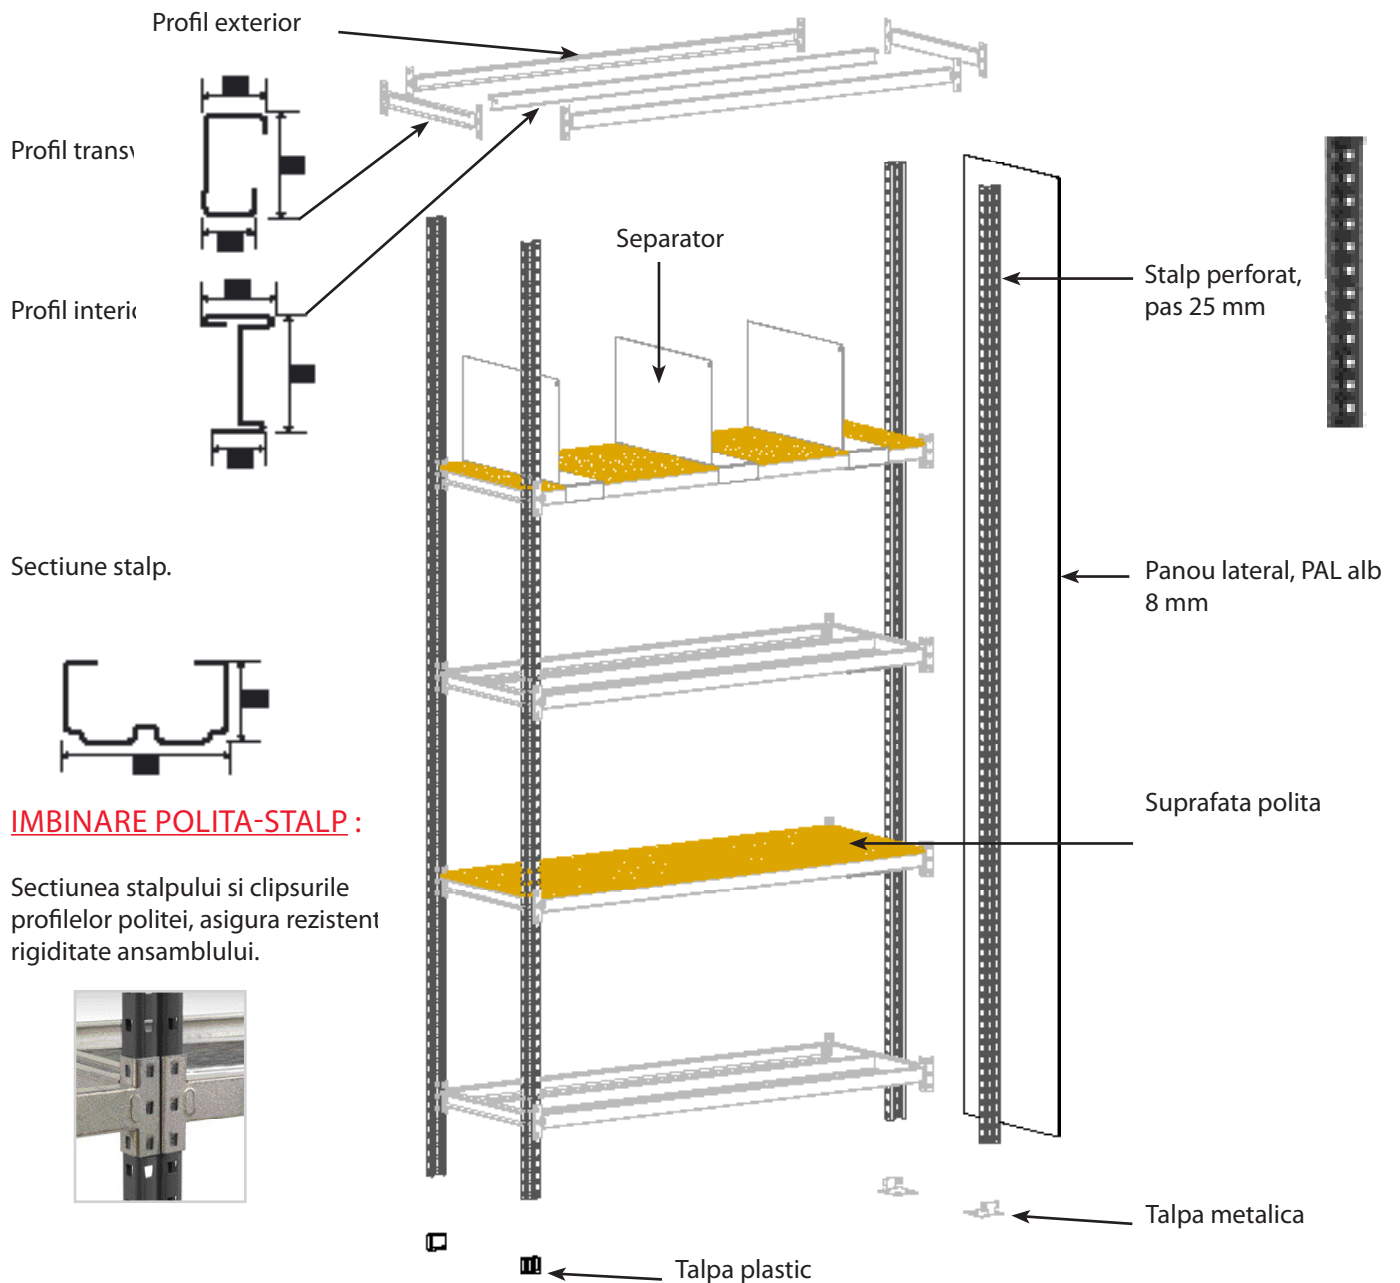

CAPACITATI INCARCARE :

CAPACITATI RAME	
Intre polite	Capacitati rame
250 mm	1770 kg
375 mm	1545 kg
500 mm	1260 kg
625 mm	980 kg
750 mm	755 kg
875 mm	590 kg
1000 mm	470 kg

CAPACITATI POLITE (UD)		
Adancime	Lungime	
	1000	1250
250	135 kg	110 kg
300	135 kg	110 kg
350	135 kg	110 kg
400	135 kg	110 kg
500	200 kg	160 kg
600	200 kg	160 kg
700	200 kg	160 kg
800	150 kg	150 kg