

RAFTURI DEPOZITARE USOARA RAFTURI TUBULARE

Componente:

STALPI :

Sectiune C 30 x 22 x 1,5 mm

6 inaltimi standard: 1750, 2000, 2250, 2500, 2750 si 3000 mm

POLITE :

- polite standard : teava 20 x 20
- polite intarite : teava 40 x 20
- adancimi: 300, 350, 400, 500, 600, 700, 800 si 1000 mm
- lungimi : 1000, 1250 si 1500 mm
- ajustare pe inaltime: 62,5 mm (31,25 mm la cerere)

COMPONENTE POLITE:

- 2 profile pe adancime
- 2 tevi exterioare pe lungime
- Numarul de tevi interioare in functie de adancimea politei :

. 300, 350 sau 400 mm : 1 teava interioara



. 500 mm adancime : 2 tevi interioare



. 600 mm adancime : 2 tevi interioare
(prevazuta degajare pentru a 3-a teava)



. 700 sau 800 mm adancime : 3 tevi interioare



. 1000 mm adancime : 4 tevi interioare




- SUPRAFATA POLITE :
- PFL 3 mm
 - PFL ALB 3 mm
 - tabla zincata 0.6 mm

CULORI STANDARD :

Stalpi : albastru RAL 5010
Polite si accesorii : Gri RAL 7001



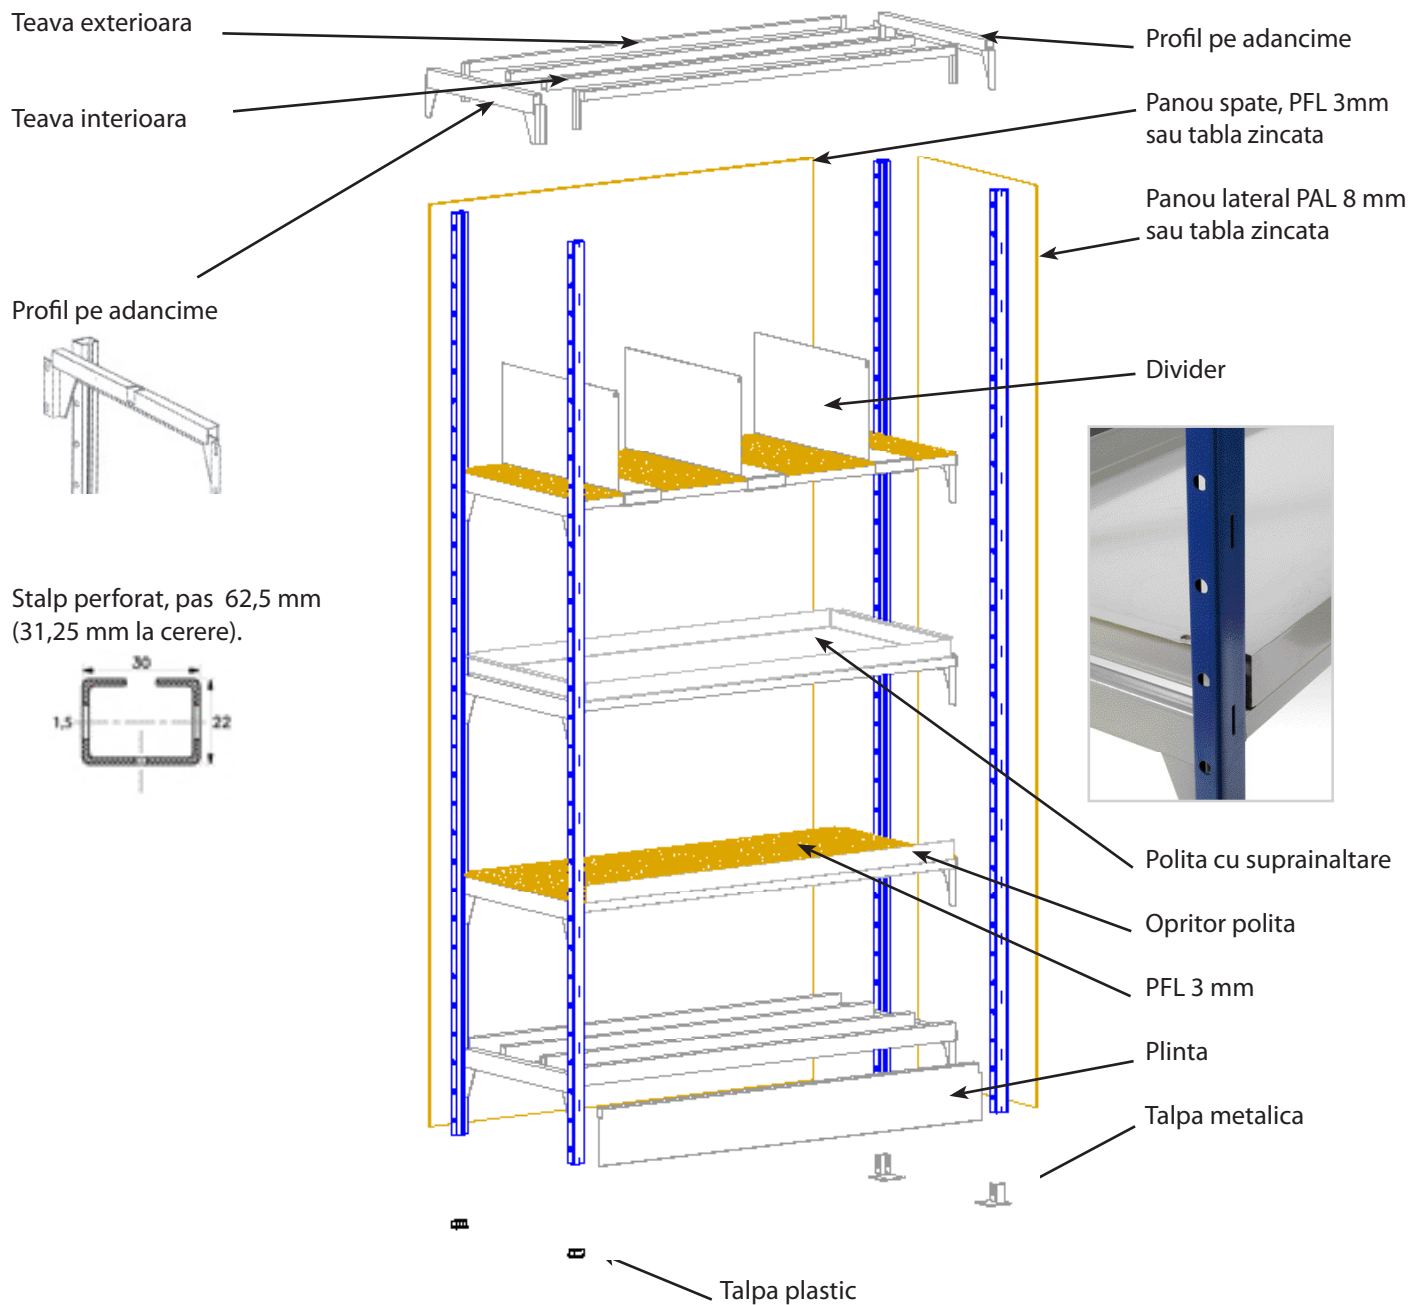

CAPACITATI IN kg (UD) polite standard cu tevi 20 x 20 :

LUNGIME 1000		
Adanc	Nr. tevi	Polite standard
300	3	135
350	3	135
400	3	135
500	4	200
600	4	200
700	5	270
800	5	230
1000	6	150

LUNGIME 1250		
Adanc	Nr. tevi	Polite standard
300	3	110
350	3	110
400	3	110
500	4	160
600	4	160
700	5	215
800	5	215
1000	6	150

LUNGIME 1500		
Adanc	Nr. tevi	Polite standard
300	3	60
350	3	60
400	3	60
500	4	90
600	4	90
700	5	120
800	5	120
1000	6	150